

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

## BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

### NOTICE OF ACCEPTANCE (NOA)

Pella Corporation 102 Main Street Pella, IA 50219

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "Direct Set" Aluminum Clad Wood Fixed Window - L.M.I.

APPROVAL DOCUMENT: Drawing No. 1287, titled "Aluminum Clad Wood Direct Set Impact Windows", sheets 1 through 4 of 4, dated 12/20/03, with revision F1 dated 09/16/13, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

### MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises and renews NOA# 12-0308.34 and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

(MIAMIDADE COUNTY)
APPROYED

Tr. 120/13

NOA No. 13-0919.08 Expiration Date: June 24, 2019 Approval Date: November 28, 2013 Page 1

### **Pella Corporation**

### NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

### A. DRAWINGS

- 1. Manufacturer's die drawings and sections.
- 2. Drawing No 1287, Sheets 1 through 4 of 4, titled "Aluminum Clad Wood Direct Set Impact Windows", dated 12/20/03, with revision F1 dated 09/16/13, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E.

### B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202–94
  - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
  - 3) Water Resistance Test, per FBC, TAS 202-94
  - 4) Large Missile Impact Test per FBC, TAS 201-94
  - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of a direct set aluminum clad wood fixed windows with IGU, prepared by Element Materials Technology, Test Report No. **TCT008189P.rev**, specimens #1 through #11, dated 01/05/12, revised on 02/14/12, signed and sealed by Jason Steen, P.E.

(Submitted under previous NOA No. 12-0308.34)

- 2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202–94
  - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202–94
  - 3) Water Resistance Test, per FBC, TAS 202-94
  - 4) Large Missile Impact Test per FBC, TAS 201–94
  - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of a direct set aluminum clad wood fixed window, prepared by Architectural Testing, Inc., Test Report No.

**ATI 97274.01–201–18**, dated 01/21/10, signed and sealed by Joseph A. Reed, P.E. (Submitted under NOA No. 10–0223.02)

- 3. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201–94
  - 2) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of a direct set aluminum clad wood fixed window, prepared by Architectural Testing, Inc., Test Reports No.

ATI 97275.01–201–18 and ATI 97276.01–201–18, dated 01/21/10, signed and sealed by Joseph A. Reed, P.E.

(Submitted under NOA No. 10-0223.02)

Manuel Pérez, P.E.
Product Control Examiner
NOA No. 13-0919.08

Expiration Date: June 24, 2019 Approval Date: November 28, 2013

### **Pella Corporation**

### NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

### B. TESTS (CONTINUED)

- 4. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202–94
  - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202–94
  - 3) Water Resistance Test, per FBC, TAS 202-94
  - 4) Large Missile Impact Test per FBC, TAS 201-94
  - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of a direct set aluminum clad wood fixed window, prepared by Stork Twin City Testing Corporation, Test Report No. TCTCW-180-6691, dated 12/15/03, signed and sealed by John D. Lee, P.E. (Submitted under NOA No. 04-0322.11)

### C. CALCULATIONS:

- 1. Anchor verification calculations and structural analysis, complying with FBC-2010, dated 02/27/12, prepared by W.W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E. (Submitted under previous NOA No. 12-0308.34)
- Glazing complies with ASTM E1300-04

### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

### E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 11-0624.02 issued to E.I. DuPont DeNemours & Co., Inc. for their "DuPont SentryGlas® Interlayer" dated 08/25/11, expiring on 01/14/17.
- 2. Notice of Acceptance No. 13-0129.27 issued to E.I. DuPont DeNemours & Co., Inc. for their "DuPont Butacite® PVB Interlayer" dated 04/11/13, expiring on 12/11/16.

### F. STATEMENTS

- 1. Statement letter of conformance, complying with the FBC-2010, dated September 03, 2013, signed and sealed by Warren W. Schaefer, P.E.
- 2. Statement letter of no financial interest, dated September 04, 2013, signed and sealed by Warren W. Schaefer, P.E.

### G. OTHERS

1. Notice of Acceptance No. 12-0308.34, issued to Pella Corporation for their Series "Direct Set" Aluminum Clad Wood Fixed Window – L.M.I., approved on 05/10/12 and expiring on 06/24/14.

Manuel Perez, P.E. Product Control Examiner NOA No. 13-0919.08

Expiration Date: June 24, 2019 Approval Date: November 28, 2013 **GENERAL NOTES:** 

THESE WINDOW SYSTEMS HAVE BEEN TESTED, ANALYZED & APPROVED FOR design pressures not to exceed those shown in the "allowable design

2. OPENINGS, BUCKING & BUCKING FASTENERS MUST BE PROPERLY DESIGNED

INSTALLED TO TRANSFER WIND LOADS TO THE STRUCTURE.

ALL HARDWARE & FASTENERS SHALL BE IN ACCORDANCE WITH THESE DRAWINGS & SHALL NOT VARY UNLESS SPECIFICALLY MENTIONED ON THE DRAWINGS. SPECIFIED ANCHOR EMBED TO BASE MATERIAL SHALL BE BEYOND WALL FINISH OR STUCCO.

4. THE DETAILS & SPECIFICATIONS SHOWN HEREIN REPRESENT THE PRODUCTS TESTED & PROPOSED FOR WATER, AIR, IMPACT, CYCLIC & UNIFORM STATIC AIR PRESSURE TESTING IN CONFORMANCE WITH THE FLORIDA BUILDING CODE PROTOCALS TAS—201, 202 & 203 FOR LARGE MISSILE IMPACT WINDOWS.

5. THESE WINDOW SYSTEMS HAVE BEEN DESIGNED IN ACCORDANCE WITH AND MEET THE REQUIREMENTS OF THE FLORIDA BUILDING CODE (FBC) INCLUDING

HIGH VELOCITY HURRICANE ZONES (HVHZ).

6. IMPACT SHUTTERS ARE NOT REQUIRED WITH THESE WINDOWS.

7. ALL ANCHORS SECURING WINDOW FRAME TO PRESSURE TREATED BUCKS OR WOOD FRAMING SHALL BE CAPABLE OF RESISTING CORROSION CAUSED BY THE PRESSURE TREATING CHEMICALS IN THE WOOD.

8. DETERMINE THE POSITIVE & NEGATIVE DESIGN LOADS TO USE WHEN REFERENCING THESE DOCUMENTS IN ACCORDANCE WITH THE GOVERNING CODE AND GOVERNING WIND VELOCITY. FOR WIND LOAD CALCULATIONS IN ACCORDANCE WITH THE FLORIDA BUILDING CODE, A DIRECTIONALITY FACTOR OF Kd = 0.85 MAY BE APPLIED PER THE ASCE-7 STANDARD.

9. NO INCREASE IN ALLOWABLE STRESS HAS BEEN USED IN THE CERTIFICATION OF THIS PRODUCT. WIND LOAD DURATION FACTOR Cd=1.6WAS USED FOR WOOD SCREW ANALYSIS ONLY.

10. MATERIALS, INCLUDING BUT NOT LIMITED TO STEEL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF FLORIDA BUILDING CODE CHAPTER 20.

11. ALL WOOD MEMBERS OF WINDOWS THAT MAY POSSIBLY COME INTO CONTACT WITH MASONRY OR CONCRETE SUBSTRATES, ARE SUBJECT TO MOISTURE &/OR ARE SUBJECT TO THE OUTSIDE ENVIRONMENT SHALL BE OF AN APPROVED DURABLE SPECIES OR BE TREATED IN AN APPROVED METHOD WITH AN APPROVED PRESERVATIVE PER FBC SECTION 2326.


# APPROVED SHAPES

### NOTES

- 1. OTHER SHAPES MAY APPLY PROVIDING THEY ARE SIMILAR TO THOSE SHOWN & HAVE CORNER CONSTRUCTION PER CORNER DETAILS.
- 2. ALL UNITS MUST FIT INSCRIBED INTO THE ALLOWABLE LOAD TABLE DIMENSIONS (SEE SHEET 2) & BE GOVERNED BY THE ALLOWABLE PRESSURE OF THE RESPECTIVE UNIT SIZE IN THE LOAD TABLE.
- 3. RECTANGULAR WINDOWS SHOWN, ANCHORING OF SHAPED WINDOWS IS THE SAME WITH REQUIRED ANCHOR SPACING ALONG THE FRAME CIRCUMFERENCE BEING THE SAME AS SPECIFIED FOR A STRAIGHT FRAME.

FRAME ANCHOR REQUIREMENTS TABLE											
OPENING TYPE (SUBSTRATE)	FRAME/CLIP TO OPENING FASTENER TYPE	MINIMUM EMBED	MINIMUM EDGE DIST								
FRAME SCREWS											
MIN. 2X4 WOOD FRAME OR BUCK (MIN. GR. 3 & G=0.55)	NO. 10 SMS OR WOOD SCREW	1 1/4"	3/4"								
MIN. 18 GA. 33 KSI METAL STUD	NO. 10 GR. 5 SELF TAP/DRILL SCREW	FULL	1/2"								
MIN. 1/8" THK A36 STEEL	NO. 10 GR. 5 SELF TAP/DRILL SCREW	FULL	1/2"								
MIN. 1/8" THK 6063-T5 ALUM.	NO. 10 GR. 5 SELF TAP/DRILL SCREW	FULL.	1/2"								
C-90 CMU/2500 PSI CONCRETE	(1) 1/4" CONCRETE SCREW	1 1/4"	2"								
(2) INSTALLATION CLIP SCREWS (STANDARD BENT CONDITION)											
MIN. 2X4 WOOD FRAME OR BUCK (MIN. GR. 3 & G=0.55)	NO. 8 X 1 1/2" SMS	1 3/8"	(2) N/A								
MIN. 1/8" THK A36 STEEL	NO. 8 GR. 5 SELF TAP/DRILL SCREW	FULL	(2) N/A								
MIN. 1/8" THK 6063T5 ALUM.	NO. 8 GR. 5 SELF TAP/DRILL SCREW	FULL	(2) N/A								
INSTALLATION CLIP S	CREWS (ALTERNATE STRAIGHT	COND	ITION)								
MIN. 2X6 WOOD FRAME OR BUCK (MIN. GR. 3 & G=0.55)	NO. 8 X 1 1/2" SMS	1 3/8"	3/4"								
MIN. 18 GA. 33 KSI METAL STUD	NO. 8 GR. 5 SELF TAP/DRILL SCREW	FULL	1/2"								
MIN. 1/8" THK A36 STEEL	NO. 8 GR. 5 SELF TAP/DRILL SCREW	FULL	1/2"								
MIN. 1/8" THK 6063-T5 ALUM.	NO. 8 GR. 5 SELF TAP/DRILL SCREW	FULL	1/2"								
(1) CONCRETE SCREWS SHALL RE FLOO HITRACONS (C.S.) FLOO CRETE—FLEX (S.S.) ITW											

 CONCRETE SCREWS SHALL BE ELCO ULTRACONS (C.S.), ELCO CRETE-FLEX (S.S.), ITW RAMSET/RED HEAD TAPCONS (C.S. OR S.S.) OR HILTI KWIK-CON II (C.S OR S.S.). 2) STANDARD BENT CLIP INSTALLATION SCREWS SHALL BE POSITIONED WITHIN 1/4" OF THE BUCK/SUBSTRATE EDGE AND, IF INTO WOOD, ANGLED 20 TO 30 DEGREES INTO THE BUCK. ---- EDGE DISTANCE MAY BE DECREASED TO 1/2" IF SCREWS ARE ANGLED 15 TO 20 DEGREES AWAY FROM THE EDGE.

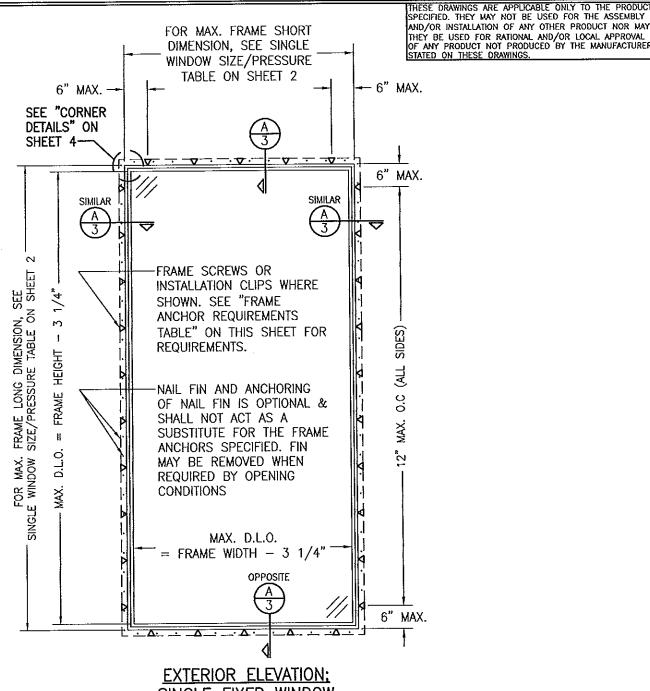

# SINGLE FIXED WINDOW


SCALE: 1/2" = 1'-0"(RECTANGULAR WINDOW SHOWN, SHAPED WINDOWS ALSO APPLY. SEE "APPROVED SHAPES" TABLE ON THIS SHEET)

> ALLOWABLE DESIGN PRESSURE SEE LOAD TABLE ON SHEET 2

> > PRODUCT REVISED as complying with the Florida **Building Code** Acceptance No 13-0919 Expiration Date June

Miami/Dade Product Control



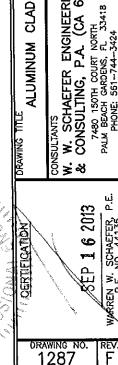

SHEET NO.

0F

HECKED BY:

ATE: 12/20/03

OT: 1=24

WINDOWS

IMPACT

DIRECT

WOOD

CLAD

RING 6809)

ALLOWABLE SIZE/PRESSURE TABLE																	
WINDOW ALLOWABLE DESIGN PRESSURE (PSF)																	
DIMENSION		GLASS		GLA	GLASS G		SS	GLASS		GLASS		GLASS		GLASS		GLASS	
MAX. LONG SIDE	MAX. SHORT SIDE	OPT 1		OPTION 2		OPTION 3		OPTION 4		OPTION 5		OPTION 6		OPTION 7		OPT 8	ION
(IN.)	(IN.)	POS	_	POS	NEG		NEG	POS	NEG	POS	NEG	POS	NEG	POS	NEG	POS	NEG
120	60 54	50.3 56.3	50.3 56.3	75.0 75.0	75.0 75.0	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	54.6 60.0	54.6 60.0	60.0 60.0	60.0
	48 42	63.6 75.0	63.6 75.0	75.0 75.0	75.0 75.0	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	60.0	60.0	60.0	60.0
120	38	75.0	75.0	75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	25 21	75.0 75.0	75.0 75.0	75.0 75.0	85.0 85.0	60.0	60.0	90.0	60.0 90.0	60.0 60.0	60.0	60.0	60.0	60.0	60.0 60.0	60.0	60.0 60.0
	66	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	56.2	56.2	60.0	60.0
	60 54	55.9 61.5	55.9 61.5	75.0 75.0	75.0 75.0	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	60.0	60.0	60.0	60.0
108	48	69.8 75.0	69.8 75.0	75.0 75.0	75.0 85.0	N/A N/A	N/A N/A	52.7	52.7 60.0	N/A N/A	N/A N/A	60.0 60.0	60.0 60.0	60.0	60.0 60.0	60.0	60.0
	28	75.0	75.0	75.0	85.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
	23 68	75.0 N/A	75.0 N/A	75.0 N/A	85.0 N/A	60.0 N/A	60.0 N/A	90.0 N/A	90.0 N/A	60.0 N/A	60.0 N/A	60.0 N/A	60.0 N/A	60.0 56.8	60.0 56.8	60.0 60.0	60.0 60.0
	60	57.9	57.9	75.0	75.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	60.0	60.0	60.0	60.0
405	54 52	63.4 66.0	63.4 66.0	75.0 75.0	75.0 75.0	N/A N/A	N/A N/A	N/A 55.3	N/A 55.3	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	60.0	60.0 60.0	60.0	60.0 60.0
105	48	71.8	71.8	75.0	85.0	N/A	N/A	59.7	59.7	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	43 29	75.0 75.0	75.0 75.0	75.0 75.0	85.0 85.0	N/A 60.0	N/A 60.0	60.0	60.0 60.0	N/A 60.0	N/A 60.0	60.0	60.0 60.0	60.0	60.0 60.0	60.0	60.0 60.0
	24	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0	60.0	60.0 N/A	60.0 N/A	60.0	60.0 57.9	60.0	60.0
	74 66	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A	N/A	57.9 60.0	60.0	60.0 60.0	60.0 60.0
	60 54	62.3 68.4	62.3 68.4	75.0 75.0	75.0 75.0	N/A N/A	N/A N/A	N/A 58.3	N/A 58.3	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	60.0	60.0	60.0	60.0
98	48	75.0	75.0	75.0	75.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	47 30	75.0 75.0	75.0 75.0	75.0 75.0	85.0 85.0	N/A 60.0	N/A 60.0	60.0	60.0 60.0	N/A 60.0	N/A 60.0	60.0	60.0	60.0	60.0 60.0	60.0	60.0
	26	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
	74 66	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	59.2 60.0	59.2 60.0	60.0	
96	60	63.7	63.7	75.0	75.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	60.0	60.0	60.0	60.0
96	54 48	69.7 75.0	69.7 75.0	75.0 75.0		N/A N/A	N/A N/A	60.0	60.0 60.0	N/A N/A	N/A N/A	60.0	60.0	60.0	60.0	60.0 60.0	60.0
	31 26	75.0 75.0		75.0 75.0		60.0 60.0	60.0	60.0 90.0	60.0 90.0	60.0 60.0	60.0 60.0	60.0 60.0	60.0 60.0	60.0 60.0	60.0 60.0	60.0 60.0	1
84	74	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	60.0	60.0	60.0	60.0
	66 60	N/A 73.1	-	N/A 75.0		N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	60.0	60.0	60.0	
	54	75.0	75.0	75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60,0
	48 36	75.0 75.0		75.0 75.0		N/A 60.0	N/A 60.0	60.0	60.0 60.0	N/A 60.0	N/A 60.0	60.0		60.0 60.0		60.0 60.0	***************************************
ļ	30	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
79	74 66	N/A N/A		N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	N/A N/A	N/A N/A	N/A 60.0	N/A 60.0	60.0 60.0	60.0	60.0 60.0	
	60 54	75.0 75.0	75.0	75.0	75.0	N/A	N/A	60.0	60.0 60.0	N/A N/A	N/A N/A	60.0 60.0	60.0	60.0 60.0	60.0	60.0 60.0	60.0
	39	75.0	75.0	75.0	85.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
	36 32	75.0 75.0		75.0 75.0				60.0 90.0	60.0 90.0	60.0 60.0	60.0	60.0 60.0	60.0	60.0 60.0	7	60.0 60.0	
	74	71.6	71.6	75.0	75.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	66 60	75.0 75.0	75.0 75.0				N/A N/A	60.0	60.0	N/A N/A	N/A N/A	60.0	T	60.0	1	60.0 60.0	
74	54	75.0	75.0	75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	40 34	75.0 75.0		75.0 75.0		11		90.0	<del></del>	60.0 60.0	60.0	60.0	<del>1                                    </del>	60.0		60.0 60.0	-
	, -,	,			,	.,						.,	, ,,,,,	.,	, , , , , ,	.,	1

ALLOWABLE SIZE/PRESSURE TABLE																	
WIND FRA	ME	ALLOWABLE DESIGN PRESSURE (PSF)															
MAX. LONG SIDE	MAX. SHORT SIDE	GLA OPT 1		GLA OPT 2	ION	GLASS OPTION 3		GLASS OPTION 4		GLASS OPTION 5		GLASS OPTION 6		GLASS OPTION 7		GLASS OPTION 8	
(IN.)	(IN.)	POS	NEG	POS	NEG	POS	NEG	POS	NEG	POS	NEG	POS	NEG	POS	NEG	POS	NEG
	73	73.4	73.4	75.0	75.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	66	75.0	75.0	75.0	75.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
73 <u>60</u> 54	75.0		75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0	
	75.0	75.0	75.0	85.0	N/A	N/A	60.0	60,0	N/A	N/A	60.0	60.0	60.0	60.0	60.0		
	42	75.0	_	75.0	85.0	60.0	60.0	60.0		60.0	60.0	60.0	60.0	60.0		60.0	60.0
	35	75.0	75.0	75.0	85.0	60.0	60.0	90.0		60.0	60.0	60.0	60.0	60.0	60.0	60.0	
	66	75.0		75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
66	60	75.0	-	75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
	45	75.0		75.0	85.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
	38	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	
	60	75.0	75.0	75.0	85.0	N/A	N/A	60.0	60.0	N/A	N/A	60.0	60.0	60.0	60.0	60.0	60.0
60	50	75.0	75.0	75.0	85.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
	42	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0	60.0	60.0	60,0	60.0	60.0	60.0	60.0
55	55	75.0	75.0	75.0	85.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	
J.J	46	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
50	50	75.0	75.0	75.0	85.0	60.0	60.0	90.0	90.0	60.0			60.0	60.0	60.0	60.0	60.0

- 1. ALL SIZES IN TABLE ARE BASED ON TESTED SIZES & DO NOT EXCEED THE WINDOW AREA TESTED.
- 2. "N/A" DESIGNATES A SIZE NOT APPLICABLE TO THAT GLASS OPTION.

  3. SEE GLAZING DETAILS FOR GLASS OPTIONS.

  4. LONG DIMENSION MAY BE HORIZONTAL OR VERTICAL

PRODUCT REVISED
as complying with the Plurida
Building Code Building Code
Acceptance No 13-0919, 68
Expiration Date 1406 24, 2019
By Walled Due
Miami Dade Product Control

ALUMINUM CLAD WOOD DIRECT SET IMPACT WINDOWS W. SCHAEFER ENGINEERING CONSULTING, P.A. (CA 6809) 2013 SEP/16

DRAWING NO.
1287
SHEET NO.
2 OF 4

CHECKED BY: W.W.S.

DATE: 12/20/03

PLOT: 1=24

